


Rodamiento conico

XUB-30216-YFA30216-TIMKEN - XUB-30216-YFA30216-TIMKEN

<https://www.123rodamiento.mx/rodamiento-cojinete/rodamiento-rodillos/conico/xub-30216-yfa30216-timken>

TAPERED ROLLER BEARINGS
SINGLE-ROW • IsoClass

IsoClass

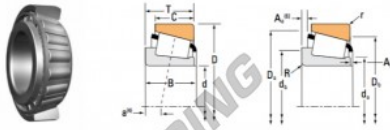

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width T	Dynamic ⁽¹⁾ C ₁	Factor ⁽²⁾ e	Dynamic ⁽³⁾ C ₂	Factor ⁽³⁾ K	Static C ₀	Assembly Inner/Outer		
mm	mm	mm	N		N		N			
80.000	141.000	30.250	104000	0.42	42400	30500	1.28	187000	XUB-30216/YFA30216	
3.1496	5.5512	1.1908	26850		9530	8660		42000		

Bearing Dimensions										Geometry Factors			Bearing Weight		
Shaft					Housing					C ₁	C ₂	C ₃			
Width B	Width C	ER Dr. a ⁽⁴⁾	Max Shaft Fillet Radius R ⁽⁵⁾	Backing Shoulder Dia. d ₆	Max Housing Fillet Radius r ⁽⁶⁾	Backing Shoulder Dia. D ₆	Capo A ₁ ⁽⁷⁾	A ₂ ⁽⁷⁾							kg
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm						
30.000	22.000	-0.0	0.5	80.0	2.0	130.0	128.0	3.0	3.0	0.15	0.14	80.7	28.4	0.0771	1.88
1.1824	0.8661	-0.00	0.02	3.14	0.08	5.24	5.04	0.15	0.14						3.98

CARACTERÍSTICAS DEL PRODUCTO

Marca	TIMKEN
N° Ean13	3663952353661
Diámetro interior	80 mm
Diámetro exterior	141 mm
Espesor	30.25 mm
Envasado	1

contacto@123rodamiento.mx

+34 911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE