


Seguidor de leva CF30-R-IKO - CF30-R-IKO

<https://www.123rodamiento.mx/rodamiento-cojinete/rodamiento-bola/seguidor-leva/cf30-r-iko>



CAM FOLLOWERS

Standard Type Cam Follower With Cage/With Screwdriver Slot

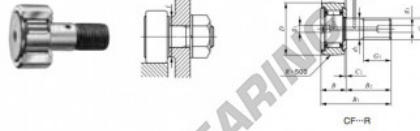

| Stud dia. mm | Identification number | | | | Mass (Ref.) | | | | |
|-----------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------|----|----|----------------|---------|
| | Shield type | | Sealed type | | g | D | C | d ₁ | G |
| | With crowned outer ring | With cylindrical outer ring | With crowned outer ring | With cylindrical outer ring | | | | | |
| 30 | CF30 | R | | | 1 870 | 80 | 35 | 30 | M30×1.5 |

| Boundary dimensions mm | | | | | | | | | | Mounting dimension f Min. mm | Maximum tightening torque N·m | Ball dynamic load rating C N | Ball static load rating C ₀ N | Maximum allowable static load N | |
|------------------------|----|----------------|----------------|----------------|----------------|----------------|----------------|--------------------|-----|---------------------------------------|----------------------------------------|---------------------------------------|---------------------------------------------------|------------------------------------------|--------|
| G ₁ | B | B ₁ | B ₂ | B ₃ | C ₁ | g ₁ | g ₂ | r _s max | (°) | | | | | | |
| 32 | 37 | max | 100 | max | 63 | 15 | 1 | 8 | 4 | 1 | 49 | 438 | 45 400 | 85 100 | 85 100 |

CARACTERÍSTICAS DEL PRODUCTO

| | |
|-------------------|---------------|
| Marca | IKO |
| N° Ean13 | 3663952441566 |
| Diámetro interior | 30 mm |
| Diámetro exterior | 80 mm |
| Espesor | 35 mm |
| Envasado | 1 |

contacto@123rodamiento.mx

+34 911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE