


Casquillos de agujas BA1612-Z-IKO - BA1612-Z-IKO

<https://www.123rodamiento.mx/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/ba1612-z-iko>

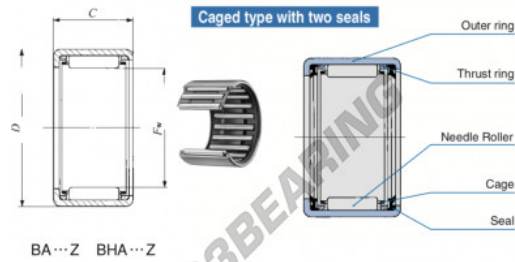

Boundary dimensions mm[inch]			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ¹⁾	Assembled inner ring
F_w	D	C	G	h_6	H_7	C	C_0	rpm		
25.400 (1.0118)	31.750 (1.2496)	19.050 (0.7500)	2.8	Max.	Min.	Max.	Min.	14200	24300	15000 (RB 1212)

CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
N° Ean13	3616060601186
Diámetro interior	25.4 mm
Diámetro exterior	31.75 mm
Espesor	19.05 mm
Velocidad límite	15000 rpm
Carga dinámica	14.2 kN
Carga estática	24.3 kN
Envasado	1

contacto@123rodamiento.mx

+34 911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE