


## Casquillos de agujas BA1916-Z-IKO - BA1916-Z-IKO

<https://www.123rodamiento.mx/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/ba1916-z-iko>

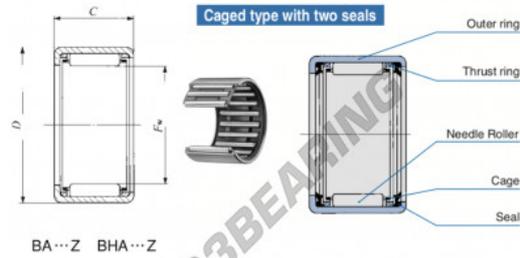

Boundary dimensions mm(Inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed <sup>(1)</sup>	Assembled inner ring
$F_w$	$D$	$C$	$d_2$	$d_4$	$d_7$	$C$	$C_0$	rpm		
30.162 (1.1870)	38.100 (1.5000)	25.40 (1.0000)	2.8	30.162 (1.1875)	30.146 (1.1868)	38.114 (1.5005)	38.089 (1.4991)	25800	45300	12000

### CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
N° Ean13	3616060601308
Diámetro interior	30.162 mm
Diámetro exterior	38.1 mm
Espesor	25.4 mm
Velocidad límite	12000 rpm
Carga dinámica	25.8 kN
Carga estática	45.3 kN
Envasado	1

[contacto@123rodamiento.mx](mailto:contacto@123rodamiento.mx)

+34 911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE