


## Casquillos de agujas BA3016-Z-IKO - BA3016-Z-IKO

<https://www.123rodamiento.mx/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/ba3016-z-iko>

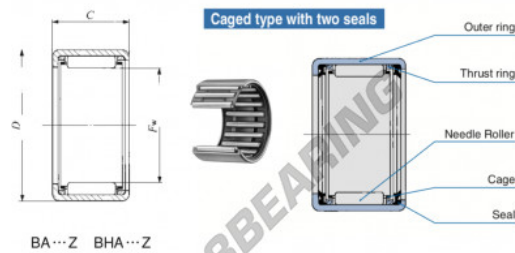

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(1)	Assembled inner ring
$F_w$	$D$	$C$	$c_2$	$h_6$	$JT$	$C$	$C_0$	$n$	$N$	
			Min.	Max.	Min.	Max.	Min.	N	N	
47.625	1.8 9/16	150	12.14	25.40(1.000)	2.8			95400	7000	

## CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
N° Ean13	3616060601568
Diámetro interior	47.625 mm
Diámetro exterior	57.15 mm
Espesor	25.4 mm
Velocidad límite	7000 rpm
Carga dinámica	35.4 kN
Carga estática	70.6 kN
Envasado	1

[contacto@123rodamiento.mx](mailto:contacto@123rodamiento.mx)

+34 911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE