


## Casquillos de agujas BA108-Z-IKO - BA108-Z-IKO

<https://www.123rodamiento.mx/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/ba108-z-iko>

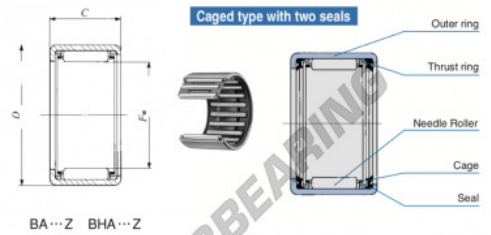

Boundary dimensions mm(inch)			Standard mounting dimensions mm			Basic dynamic	Basic static	Allowable	Assembled
$F_w$	$D$	$C$	$\frac{D}{d}$	$\frac{C}{d}$	$\frac{B}{d}$	load rating	load rating	rotational	inner ring
			Min.	Min.	Max.	Min.	N	rpm	
15.875 (5/8)	20.638 (3/4)	12.7 (1/2)	1.3			5420	7310	25000	RB 68-1

## CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
N° Ean13	3616060602954
Diámetro interior	15.875 mm
Diámetro exterior	20.638 mm
Espesor	12.7 mm
Velocidad límite	25000 rpm
Carga dinámica	5.42 kN
Carga estática	7.31 kN
Envasado	1

[contacto@123rodamiento.mx](mailto:contacto@123rodamiento.mx)

+34 911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE