


## Casquillos de agujas BA1014-Z-IKO - BA1014-Z-IKO

<https://www.123rodamiento.mx/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/ba1014-z-iko>

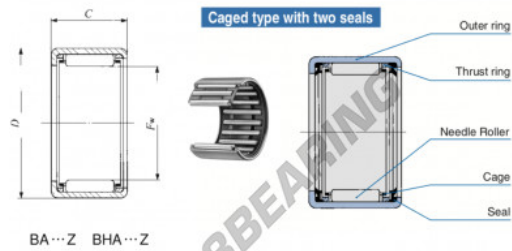

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(r/min)	Assembled inner ring	
$F_w$	$D$	$C$	$d_1$	$d_2$	$J_1$	$J_2$	$C$	$C_0$			
			Shaft dia.	Housing bore dia.							
			Min.	Max.	Min.	Max.	N	N	r/min		
15.875 (5/8)	20.638 (0.812)	22.221 (0.875)	1.3	15.875	15.854	20.650	20.625	10700	17500	25000	IRB T14

### CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
N° Ean13	3616060602985
Diámetro interior	15.875 mm
Diámetro exterior	20.638 mm
Espesor	22.22 mm
Velocidad límite	25000 rpm
Peso	100 g
Carga dinámica	10.7 kN
Carga estática	17.5 kN
Envasado	-
Estándar	Ninguna norma

[contacto@123rodamiento.mx](mailto:contacto@123rodamiento.mx)

+34 911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE