


Casquillos de agujas BA88-Z-IKO - BA88-Z-IKO

<https://www.123rodamiento.mx/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/ba88-z-iko>

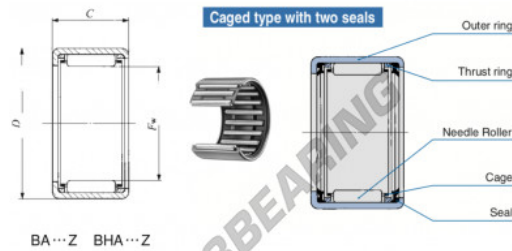

| Boundary dimensions mm(inch) | | | Standard mounting dimensions mm | | | | Basic dynamic load rating | Basic static load rating | Allowable rotational speed(r) | Assembled inner ring | |
|------------------------------|---------------|--------------|---------------------------------|--------|--------|--------|---------------------------|--------------------------|-------------------------------|----------------------|-------|
| P_{in} | D | C | d_1 | d_2 | d_3 | C | C_0 | | | | |
| | | | Max. | Max. | Min. | Max. | Min. | N | N | | |
| 12.700 (1/2) | 17.462 (3/16) | 12.750 (5/8) | 1 | 12.700 | 12.689 | 17.472 | 17.454 | 4710 | 5700 | 30000 | RB 58 |

CARACTERÍSTICAS DEL PRODUCTO

| | |
|-------------------|---------------|
| Marca | IKO |
| N° Ean13 | 3616060603081 |
| Diámetro interior | 12.7 mm |
| Diámetro exterior | 17.462 mm |
| Espesor | 12.7 mm |
| Velocidad límite | 30000 rpm |
| Carga dinámica | 4.71 kN |
| Carga estática | 5.7 kN |
| Envasado | 1 |

contacto@123rodamiento.mx

+34 911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE