


## Casquillos de agujas BA138-Z-IKO - BA138-Z-IKO

<https://www.123rodamiento.mx/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/ba138-z-iko>

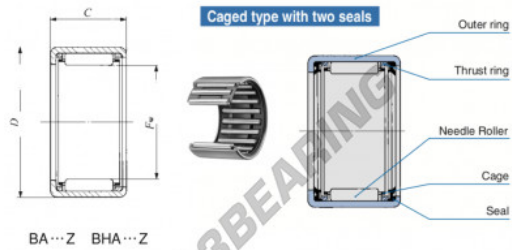

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable rotational speed(1)		Assembled inner ring	
$P_w$	$D$	$C$	$d_2$	$H_0$	$J_1$	Housing bore dia.		$C'$	$C_0$	$n$	$n_0$			
			Max.	Min.	Min.	Max.	Min.	Min.	Min.	rpm	rpm			
20.638 (0.812)	26.988 (1.062)	12.700 (500)	5.3	20.638	20.625	27.030	26.979	7170	9450	19000	98	IRB 98		

## CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
N° Ean13	3616060603227
Diámetro interior	20.638 mm
Diámetro exterior	26.988 mm
Espesor	12.7 mm
Velocidad límite	19000 rpm
Carga dinámica	7.17 kN
Carga estática	9.45 kN
Envasado	1

[contacto@123rodamiento.mx](mailto:contacto@123rodamiento.mx)

+34 911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE