


Rodamiento conico 32244-JTEKT - 32244-JTEKT

<https://www.123rodamiento.mx/rodamiento-cojinete/rodamiento-rodillos/conico/32244-jtekt>

Single-row tapered roller bearings
metric series **Koyo**

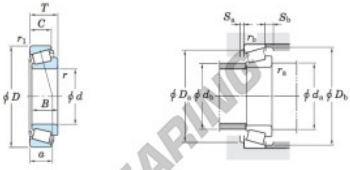

Boundary dimensions (mm)					Basic load ratings (kN)				Limiting speeds (min ⁻¹)		Bearing No. ¹⁾
d	D	T	B	C	C _r	C _{0r}	C ₉₀	C ₁₀₀	Grease lub.	Oil lub.	
220	400	114	108	90	1190	1930	830	1100			32244

Dimension series to ISO95 (Refer. 1)	Load center (mm) a	Mounting dimensions (mm)										Constant e	Axial load factors		(Refer. 1) Mass (kg)
		d _{1a} min.	d _{1a} max.	D _{1a} min.	D _{1a} max.	S _{1a} min.	S _{1a} max.	r _{1a} min.	r _{1a} max.	r _{1b} min.	r _{1b} max.		Y ₁	Y ₀	
—	95.9	242	260	382	333	377	16	14	4	3	0.43	1.39	0.77	56.8	

CARACTERÍSTICAS DEL PRODUCTO

Marca	JTEKT
N° Ean13	4549250221200
Diámetro interior	220 mm
Diámetro exterior	400 mm
Espesor	114 mm
Envasado	1

contacto@123rodamiento.mx

+34 911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE