


Rodamiento de agujas BKM131715J-JTEKT - BKM131715J-JTEKT

<https://www.123rodamiento.mx/rodamiento-cojinete/rodamiento-agujas/agujas/bkm131715j-jtekt>

Drawn cup needle roller bearings 

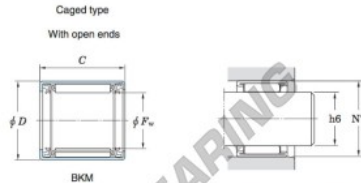

| Boundary dimensions (mm) | | | | Basic load ratings (kN) | | Limiting speeds (min ⁻¹) | | Bearing No. ²⁾ | |
|--------------------------|-----|-----|----------|-------------------------|----------|--------------------------------------|----------|---------------------------|-----------------|
| F_w | D | C | b min. | C_0 | C_{0r} | Oil lub. | Oil lub. | With open ends | With closed end |
| 13 | 17 | 15 | — | 5.10 | 7.85 | 27 000 | — | BKM131715J | |

| Full complement type | | Recommended dimensions (mm) | | | | (Refer.) Mass (g) | |
|----------------------|-----------------|-----------------------------|----------------------|-----------------------------|-----------------------------|-------------------|-----------------|
| With open ends | With closed end | Shaft dia. (H6) min. | Shaft dia. (H6) max. | Housing bore dia. (N7) min. | Housing bore dia. (N7) max. | With open ends | With closed end |
| — | — | 12.989 | 12.000 | 16.977 | 16.995 | 7.1 | — |

CARACTERÍSTICAS DEL PRODUCTO

| | |
|-------------------|---------------|
| Marca | JTEKT |
| N° Ean13 | 3663952469812 |
| Diámetro interior | 13 mm |
| Diámetro exterior | 17 mm |
| Espesor | 15 mm |
| Peso | 7.1 g |
| Envasado | 1 |

contacto@123rodamiento.mx

+34 911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE