


## Rodamiento conico 46226A-JTEKT - 46226A-JTEKT

<https://www.123rodamiento.mx/rodamiento-cojinete/rodamiento-rodillos/conico/46226a-jtekt>

Double-row tapered roller bearings — Koyo  
TDO type

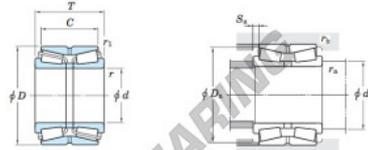

Boundary dimensions (mm)						Basic load ratings (kN)		Limiting speeds (min <sup>-1</sup> )	
<i>d</i>	<i>D</i>	<i>T</i>	<i>C</i>	<i>r</i> <sub>min.</sub>	<i>r</i> <sub>1 min.</sub>	<i>C</i> <sub>r</sub>	<i>C</i> <sub>10r</sub>	Grease lub.	Oil lub.
130	200	65	62	2.5	0.6	319	618	1 400	1 900

Bearing No.	Mounting dimensions (mm)					Constant <i>e</i>	Axial load factors			Refer.) Mass (kg)
	<i>d</i> <sub>4 min.</sub>	<i>D</i> <sub>4 min.</sub>	<i>S</i> <sub>4 min.</sub>	<i>r</i> <sub>4 max.</sub>	<i>r</i> <sub>5 max.</sub>		<i>Y</i> <sub>2</sub>	<i>Y</i> <sub>3</sub>	<i>Y</i> <sub>0</sub>	
46226A	142	185	6.5	2	0.6	0.35	1.95	2.90	1.91	7.06

### CARACTERÍSTICAS DEL PRODUCTO

Marca	JTEKT
N° Ean13	4549250133091
Diámetro interior	130 mm
Diámetro exterior	200 mm
Espesor	52 mm
2º Espesor	65 mm
Peso	7060 g
Envasado	1

[contacto@123rodamiento.mx](mailto:contacto@123rodamiento.mx)

+34 911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE