


Rodamiento conico 2580-2524YD-TIMKEN - 2580-2524YD-TIMKEN

<https://www.123rodamiento.mx/rodamiento-cojinete/rodamiento-rodillos/conico/2580-2524yd-timken>

TAPERED ROLLER BEARINGS
DOUBLE-ROW • TYPE TDO

TYPE TDO

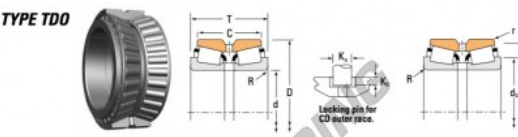

Bearing Dimensions				Load Ratings							
Bore d	O.D. D	Width T	Double Outer Ring Width C	Dynamic ⁽¹⁾		Static ⁽²⁾		Dynamic ⁽³⁾		Factor ⁽⁴⁾	
mm	mm	mm	mm	C ₁₀	C	N ₁₀	N	C ₁₀	C ₅₀	C ₁₀₀	K
31.75	69.85	66.675	57.150	10000	0.27	2.47	3.87	21700	10200	37000	2.14
1.250	2.750	2.626	2.250	3850				480	220	800	

Part Number		Dimensions						Pin		Geometry Factors			Bearing Weight
Inner	Outer	Max. Shaft Fillet Radius R ₁	Backing Shoulder Dia. d ₁	Max. Housing Fillet Radius r ₁	Backing Shoulder Dia. D ₁	K ₁	K ₂	G ₁	G ₂	C ₁	C ₂		
2580	2524YD	0.8	36.5	0.8	64.0	-	-	23.8	9.6	0.0856	1.18	2.81	
		0.03	1.52	0.03	2.52								

CARACTERÍSTICAS DEL PRODUCTO

Marca	TIMKEN
N° Ean13	3663952354934
Diámetro interior	31.75 mm
Diámetro exterior	69.85 mm
Espesor	66.675 mm
Envasado	1

contacto@123rodamiento.mx

+34 911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE