


## Rodamiento rodillos NN3007-JTEKT - NN3007-JTEKT

<https://www.123rodamiento.mx/rodamiento-cojinete/rodamiento-rodillos/rodillos/nn3007-jtekt>

Double-row cylindrical roller bearings 

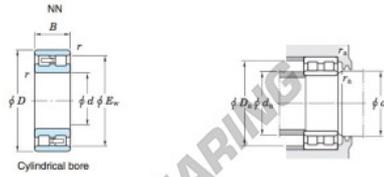

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min <sup>-1</sup> )		Bearing No.	
d	D	B	r	F <sub>w</sub>	C	C <sub>107</sub>	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
35	62	20	1	—	55	38.1	50.0	10 000	12 000	NN3007

		Mounting dimensions (mm)						(Refer.) Mass (kg)	
Cylindrical bore	Tapered bore	d <sub>a</sub>		D <sub>a</sub>		r <sub>a</sub>		Cylindrical bore	Tapered bore
		min.	max.	min.	max.	min.	max.		
		40	—	—	57	56	1	0.253	0.246

## CARACTERÍSTICAS DEL PRODUCTO

Marca	JTEKT
N° Ean13	3663952473574
Diámetro interior	35 mm
Diámetro exterior	62 mm
Espesor	20 mm
Peso	253 g
Envasado	1
Estándar	Ninguna norma

[contacto@123rodamiento.mx](mailto:contacto@123rodamiento.mx)

+34 911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE