


## Rodamiento conico 32017X-TIMKEN - 32017X-TIMKEN

<https://www.123rodamiento.mx/rodamiento-cojinete/rodamiento-rodillos/conico/32017x-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • IsoClass

**IsoClass**

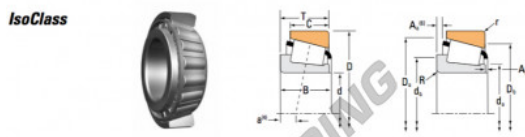

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width T	Dynamic <sup>(1)</sup> C <sub>1</sub>	Factor <sup>(2)</sup> e	Dynamic <sup>(3)</sup> C <sub>2</sub>	Factor <sup>(2)</sup> K	Static C <sub>0</sub>	Assembly Inner/Outer		
mm	mm	mm	N		N		N			
in.	in.	in.	kN		kN		kN			
85.000	130.000	29.000	193000	0.84	49900	1.32	229000	32017X		
3.3465	5.1181	1.1417	43300		11200		52900			

Bearing Dimensions										Geometry Factors		Bearing Weight	
Shaft					Housing					C <sub>1</sub>	C <sub>2</sub>		C <sub>3</sub>
Width B	Width C	ER Cr: a <sup>(1)</sup>	Max Shaft Fillet Radius R <sup>(1)</sup>	Backing Shoulder Dia. d <sub>4</sub>	Max Housing Fillet Radius r <sup>(2)</sup>	Backing Shoulder Dia. D <sub>4</sub>	Cage A <sub>1</sub> <sup>(3)</sup>	A <sub>2</sub> <sup>(3)</sup>					
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	lb
29.000	22.000	-0.5	1.5	85.0	1.5	125.0	2.1	2.8					1.30
1.1417	0.8661	-0.02	0.06	3.32	0.06	4.92	0.08	0.11					2.83

### CARACTERÍSTICAS DEL PRODUCTO

Marca	TIMKEN
N° Ean13	53893778006
Diámetro interior	85 mm
Diámetro interior	3.346" inch
Diámetro exterior	130 mm
Diámetro exterior	5.118" inch
Espesor	29 mm
Espesor	1.142" inch
Peso	1330 g
Envasado	1
Estándar	Ninguna norma

[contacto@123rodamiento.mx](mailto:contacto@123rodamiento.mx)

+34 911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE