


## Rodamiento conico 32252-TIMKEN - 32252-TIMKEN

<https://www.123rodamiento.mx/rodamiento-cojinete/rodamiento-rodillos/conico/32252-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • IsoClass

**IsoClass**

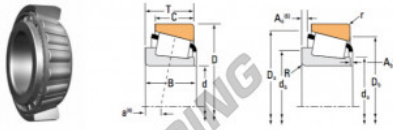

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width T	Dynamic <sup>(1)</sup> C <sub>1</sub>	Factor <sup>(2)</sup> e	Dynamic <sup>(3)</sup> C <sub>2</sub>	Factor <sup>(4)</sup> K	Static C <sub>0</sub>	Assembly Inner/Outer		
mm	mm	mm	N		N		N			
260.000	480.000	137.000	2900000	0.43	741000	1.38	4140000		32252	
10.2362	18.9071	5.3937	640000		187000		930000			

Mounting Dimensions										Geometry Factors			Bearing Weight	
Shaft					Housing					Cage	G <sub>1</sub>	G <sub>2</sub>		C <sub>3</sub>
Width B	Width C	ER Co. a <sup>(1)</sup>	Max Shaft Fillet Radius R <sup>(2)</sup>	Backing Shoulder Dia. d <sub>s</sub>	Max Housing Fillet Radius r <sup>(3)</sup>	Backing Shoulder Dia. D <sub>s</sub>	Backing Shoulder Dia. D <sub>2</sub>	A <sub>1</sub> <sup>(4)</sup>	A <sub>2</sub> <sup>(5)</sup>				G <sub>3</sub>	
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
in	in	in	in	in	in	in	in	in	in	in	in	in	in	lbs
6.1181	4.7232	-0.50	0.24	12.35	12.40	0.23	17.89	17.01	0.72	0.37	2419.2	141.7	0.1902	100.36
														229.19

### CARACTERÍSTICAS DEL PRODUCTO

Marca	TIMKEN
N° Ean13	3663952354187
Diámetro interior	260 mm
Diámetro exterior	480 mm
Espesor	137 mm
Envasado	1

[contacto@123rodamiento.mx](mailto:contacto@123rodamiento.mx)

+34 911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE