


Rodamiento conico

HM252344-HM252311D-TIMKEN - HM252344-HM252311D-TIMKEN

<https://www.123rodamiento.mx/rodamiento-cojinete/rodamiento-rodillos/conico/hm252344-hm252311d-timken>

TAPERED ROLLER BEARINGS
DOUBLE-ROW • TYPE TDO

TYPE TDO

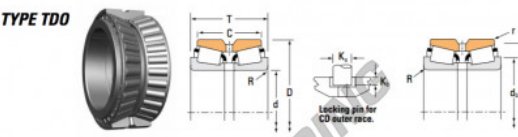

| Bearing Dimensions | | | | Load Ratings | | | | | | | | | |
|--------------------|--------------------|-------------------|---------------------------|------------------------|------|-----------------------|------|------------------------|-----------------|-----------------------|------|---|--|
| Bore d | O.D. D | Width T | Double Outer Ring Width C | Dynamic ⁽¹⁾ | | Static ⁽²⁾ | | Dynamic ⁽³⁾ | | Factor ⁽⁴⁾ | | K | |
| mm | mm | mm | mm | C ₁₀ | C | N ₁₀ | N | C ₉₀ | C ₅₀ | C ₁₀₀ | N | | |
| 254.000 10.0000 | 422.275 16.6250 | 173.038 6.8125 | 126.588 5.0020 | 200000 80000 | 0.33 | 2.03 | 3.02 | 401000 90100 | 22000 51200 | 60000 157000 | 1.25 | | |

| Part Number | | Shaft | | | | Housing | | | | Pin | | Geometry Factors | | | Bearing Weight |
|-------------|-----------|---|--------------------------------------|---|--------------------------------------|----------------|----------------|----------------|----------------|----------------|-----------------|------------------|--|--|----------------|
| Inner | Outer | Max. Shaft Fillet Radius R ₁ | Backing Shoulder Dia. d ₁ | Max. Housing Fillet Radius r ₁ | Backing Shoulder Dia. D ₁ | K ₁ | K ₂ | G ₁ | G ₂ | C ₁ | C ₂ | | | | |
| HM252344 | HM252311D | 6.8 0.27 | 267.8 11.30 | 1.5 0.06 | 406.8 15.73 | - | - | 1551.8 | 152.3 | 0.1498 | 88.43 187.15 | | | | |

CARACTERÍSTICAS DEL PRODUCTO

| | |
|-------------------|---------------|
| Marca | TIMKEN |
| N° Ean13 | 3663952362151 |
| Diámetro interior | 254 mm |
| Diámetro exterior | 422.275 mm |
| Espesor | 173.038 mm |
| Invasado | 1 |

contacto@123rodamiento.mx

+34 911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE