


## Rodamiento rodillos NNU4956-JTEKT - NNU4956-KOYO

<https://www.123rodamiento.mx/rodamiento-cojinete/rodamiento-rodillos/rodillos/nnu4956-koyo>

Double-row cylindrical roller bearings ————— **Koyo**

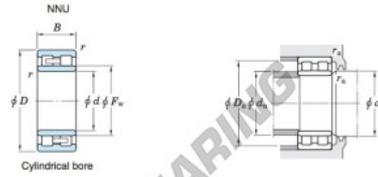

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min <sup>-1</sup> )		Bearing No.	
d	D	B	r	F <sub>w</sub>	E <sub>a</sub>	C	C <sub>107</sub>	Grease lub.	Oil lub.	NN Cylindrical bore Tapered bore
280	380	100	2.1	308	—	976	2 200	1 300	1 500	

Mounting dimensions (mm)		Cylindrical bore		Tapered bore		Mass (kg)	
d <sub>a</sub>	r <sub>a</sub>	min.	max.	min.	max.	Cylindrical bore	Tapered bore
291	305	316	369	—	2	33.1	31.6

## CARACTERÍSTICAS DEL PRODUCTO

Marca	JTEKT
N° Ean13	3663952473949
Diámetro interior	280 mm
Diámetro exterior	380 mm
Espesor	100 mm
Peso	33100 g
Envasado	1

[contacto@123rodamiento.mx](mailto:contacto@123rodamiento.mx)

+34 911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE