


Rodamiento axial de agujas AZK70957.5-IKO - AZK70957.5-IKO

<https://www.123rodamiento.mx/rodamiento-cojinete/rodamiento-agujas/axial-agujas/azk70957.5-iko>

IKO
THRUST BEARINGS
Thrust Roller Bearings

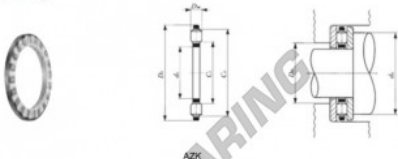

Shaft dia. mm	Identification number							
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g	
70	AZ 709518	420	AZK 70957.5	156	WS 7095 GS	7095	132	

Boundary dimensions mm										Standard mounting dimensions mm	Basic dynamic load rating C	Basic static load rating C ₀	Allowable rotational speed ⁽²⁾	
d	D	T	d _c	D _c	D _w	B	r _{s,mini} ⁽¹⁾	C _i	C _o	d _s Min.	D _s Max.	N	N	rpm
70	95	18	70.05	94.5	7.5	5.25	1	75	91	91	76	72 000	269 000	3 500

Notes: (1) Minimum allowable value of chamfer dimension r.
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
N° Ean13	3663952487052
Diámetro interior	70 mm
Diámetro exterior	95 mm
Espesor	7.5 mm
Peso	156 g
Envasado	1

contacto@123rodamiento.mx

+34 911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE